



DESIGN COMPONENTS, INC.

115 Walter Way - Fayetteville, GA 30214
 PH: (800) 868-9910 email: sales@designcomponents.com
 FX: (770) 460-7872 website: www.designcomponents.com

APPROVED BY: _____

DATE APPROVED: _____

CPM-7 (Insulated) Metal Building Roof Curb

STANDARD FEATURES

1. 18 Ga. Prime Galvalume Steel Construction.
2. Corners Mitered and Welded Watertight.
3. Curbs Prime Painted after Fabrication.
4. Water Cricket.
5. 8" Minimum Height.
6. No Clips.
7. Internal Angle Reinforcing.
8. 1 1/2" Thick, 3# Density Fiberglass Insulation.

OPTIONS


- 1.
- 2.
- 3.
- 4.

PROJECT NAME: _____

CITY, STATE: _____


CUSTOMER: _____

JOB NUMBER: _____

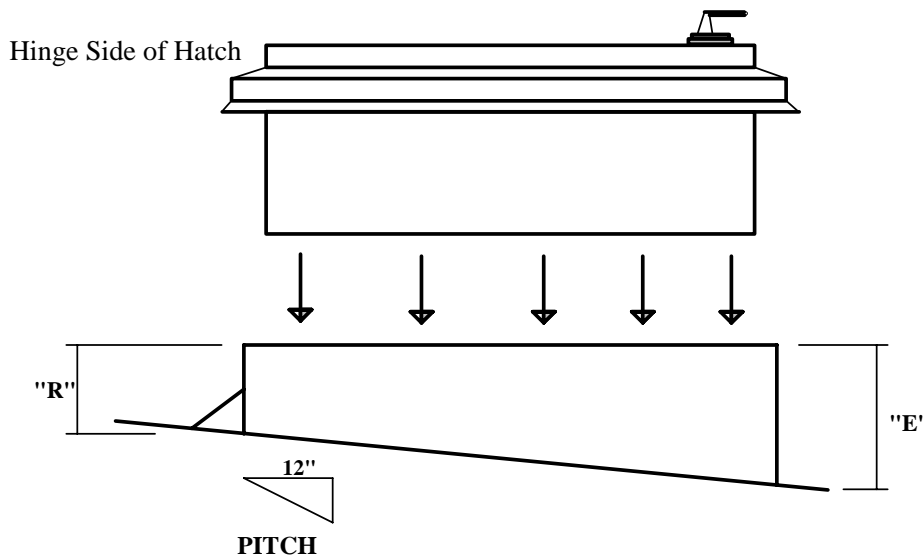

ELEVATION

Note: The Front, Rear, and Side Flanges Fit Under the Roof Panel

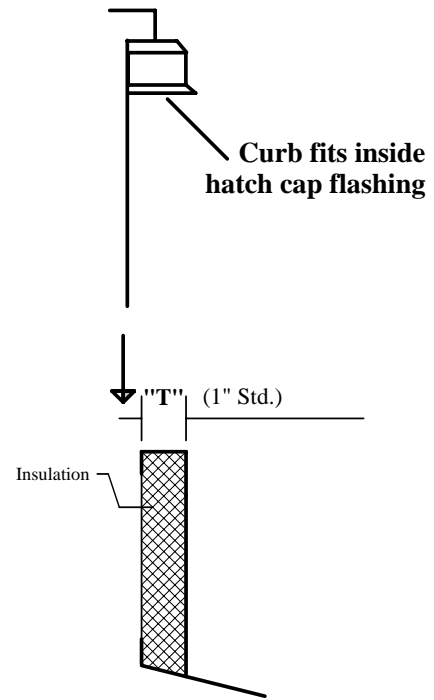

Section view of hatch sleeving into curb

QUANTITY	INSIDE DIMENSION	OUTSIDE DIMENSION	"R"	"E"	"T"	TAG
	X	X				