



**DESIGN COMPONENTS, INC.**


115 Walter Way — Fayetteville, GA 30214  
 PH: (800) 868-9910 FX: (770) 460-7872  
 email: sales@designcomponents.com  
 website: www.designcomponents.com

**Steel Fixed Louver**  
**CALL 1-800-868-9910**


## TYPICAL STEEL FIXED LOUVER

### Standard Construction:

- Frame:** 4" (101 mm) x 20 ga. galvanized steel.
- Blades:** 20 ga. galvanized steel, approximately 4-3/8" (111 mm) on centers.
- Blade Angle:** 45°
- Screen:** Bird screen - 1/2" x 1/2" (12.7 mm x 12.7 mm) x 19 ga. galvanized steel. In a removable frame on interior of louver.
- Finish:** Mill galvanized.
- Minimum Size:** 8"w x 12"h (203 mm x 304 mm)
- Options:**
  - Screens:** Insect screen - 18 x 16 mesh aluminum.  
Other: \_\_\_\_\_
  - Finish:** Prime Coat  
Baked Enamel  
Kynar 500 Enamel  
Other: \_\_\_\_\_
- Sill Extensions:**
  - Flange:** 1-1/2" (38 mm) (front or rear)
  - Material:** Various materials and gauges
  - Notes:** Louvers fabricated 1/4" (6.4 mm) under opening size unless otherwise noted.

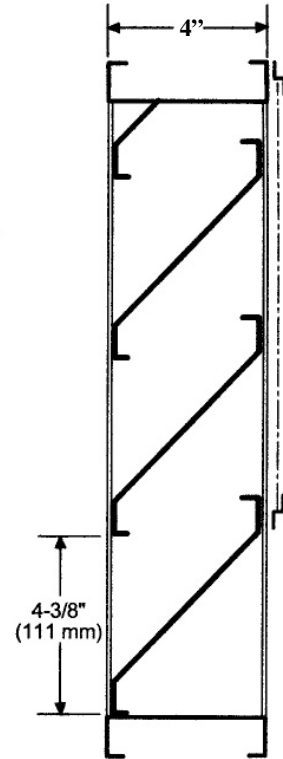

QTY	SIZE-width x height	FINISH	FRAME STYLE

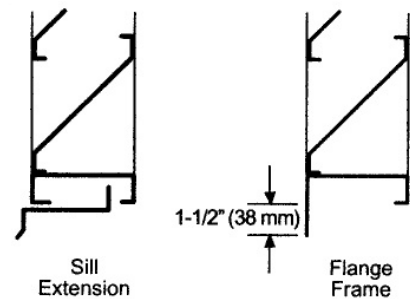

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

---

Project:	Contractor:
Location:	Address:
Architect:	P.O. Number:
Engineer:	Date:

---